

Mini Drum Core Inductor



7.5 x ϕ 8.5 mm

AIUR-01 Series



RoHS/RoHS II Compliant

FEATURES:

- Ferrite core with heat shrink tube
- High Reliability

APPLICATIONS:

- Switching Power Supplies
- Noise Filtering
- DC to DC Converters
- Electronic Household Appliances
- Buzzers and Alarm Systems
- Television and Audio Equipment

STANDARD SPECIFICATIONS:

PARAMETERS

Goldstone P/N:	AIUR-01 Series
Operating temperature:	-25°C to + 85°C
Storage temperature:	-25°C to + 125°C

Part Number AIUR-01- Inductance Code	Inductance	Tolerance	Q (Min)/ Frequency	DCR (Max)	Saturation Current (Max)	SRF (Typ)
Units	μ H	%		Ω	mA	MHz
Symbol	L	K		DCR	Isat	
AIUR-01-101	100	K	10/796KHz	2	200	6.1
AIUR-01-121	120	K	10/796KHz	3	200	5.5
AIUR-01-151	150	K	10/796KHz	3	200	5.0
AIUR-01-181	180	K	10/796KHz	3	200	4.7
AIUR-01-221	220	K	10/796KHz	3	150	4.5
AIUR-01-271	270	K	10/796KHz	3	150	4.1
AIUR-01-331	330	K	10/796KHz	4	150	4.8
AIUR-01-391	390	K	10/796KHz	4	100	3.5
AIUR-01-471	470	K	10/796KHz	5	100	3.2
AIUR-01-561	560	K	10/796KHz	6	100	2.0
AIUR-01-681	680	K	10/796KHz	6	100	2.7
AIUR-01-821	820	K	10/796KHz	7	50	2.1
AIUR-01-102	1000	K	10/252KHz	9	50	2.5
AIUR-01-122	1200	K	10/252KHz	9	50	1.9
AIUR-01-152	1500	K	10/252KHz	11	50	1.8
AIUR-01-182	1800	K	10/252KHz	12	50	1.6
AIUR-01-222	2200	K	10/252KHz	14	50	1.5
AIUR-01-272	2700	K	10/252KHz	15	50	1.4
AIUR-01-332	3300	K	10/252KHz	25	40	0.9
AIUR-01-392	3900	K	10/252KHz	30	40	0.9
AIUR-01-472	4700	K	10/252KHz	32	40	0.8
AIUR-01-562	5600	K	10/252KHz	36	30	0.7
AIUR-01-682	6800	K	10/252KHz	40	30	0.7
AIUR-01-822	8200	K	10/252KHz	45	30	0.6
AIUR-01-103	10000	K	10/79.6KHz	55	20	0.6
AIUR-01-123	12000	K	10/79.6KHz	65	20	0.5
AIUR-01-153	15000	K	10/79.6KHz	80	20	0.5

Test Conditions and equipments

L Test frequency: 100KHz 0.1Vrms

DCR: QuadTech Milliohmmeter

Isat: 10% inductance drops from initial value

GOLDSTONE
MAGNETICS

SHAANXI GOLD-STONE ELECTRONICS CO.,LTD

Web: www.gsmagnetics.com Tel:029-85401274 Fax:029-85401274 E-mail: sales@gsmagnetics.com

Mini Drum Core Inductor



AIUR-01 Series

~~Pb~~ | RoHS/RoHS II Compliant

7.5 x ϕ 8.5 mm

OPTIONS & PART IDENTIFICATION:



Packing (200pcs / box)

AIUR-01-

Inductance Code
Please refer to the
Electrical Spec Table

Tolerance
K: $\pm 10\%$

OUTLINE DRAWING:

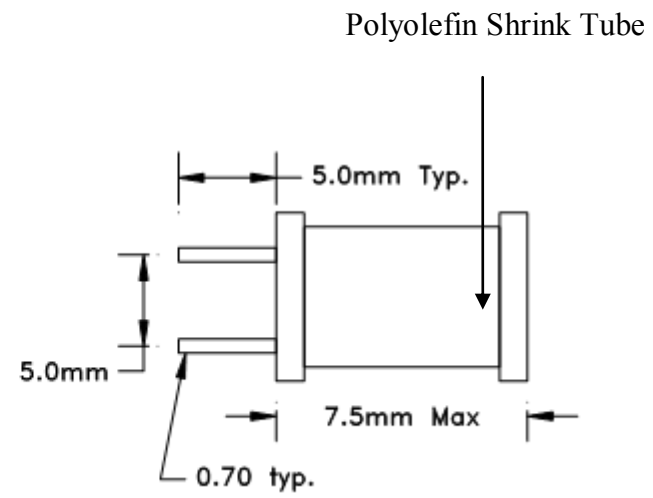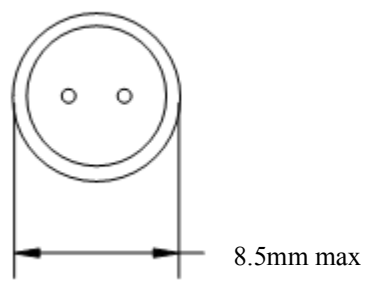

Dimension: mm



SHAANXI GOLD-STONE ELECTRONICS CO.,LTD

Web: www.gsmagnetics.com Tel: 029-85401274 Fax: 029-85401274 E-mail: sales@gsmagnetics.com