

Encapsulated Transformers


Type: EE20/10

0.5VA/0.6VA

- CE approved
- Potted under vacuum
- Dielectric strength—4000Vrms
- High ambient operation temperature(+70°C max)
- Insulation class—Class B(130°C)




Dimension (mm)

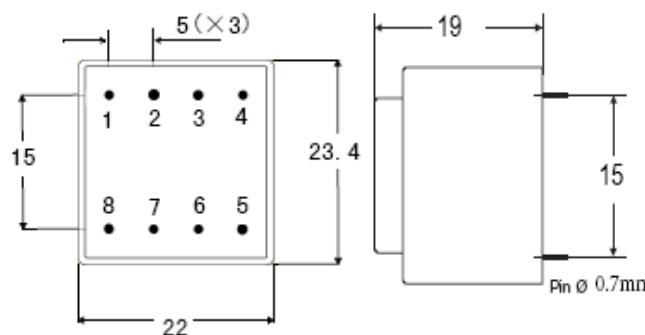

Empty pin shall be omitted if necessary

Circuit Diagram

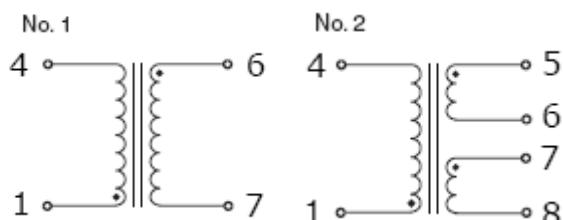

Primary (230V)	Primary (115V)	Secondary (V/m A)	Power (VA)	Circuit Diagram
EE2010001	EE2010101	6/83	0.5	1
EE2010002	EE2010102	6/100	0.6	1
EE2010003	EE2010103	9/56	0.5	1
EE2010004	EE2010104	9/67	0.6	1
EE2010005	EE2010105	12/42	0.5	1
EE2010006	EE2010106	12/50	0.6	1
EE2010007	EE2010107	15/33	0.5	1
EE2010008	EE2010108	15/40	0.6	1
EE2010009	EE2010109	18/28	0.5	1
EE2010010	EE2010110	18/33	0.6	1
EE2010011	EE2010111	24/21	0.5	1
EE2010012	EE2010112	24/25	0.6	1
EE2010013	EE2010113	2×6/42	0.5	2
EE2010014	EE2010114	2×6/50	0.6	2
EE2010015	EE2010115	2×9/28	0.5	2
EE2010016	EE2010116	2×9/33	0.6	2
EE2010017	EE2010117	2×12/21	0.5	2
EE2010018	EE2010118	2×12/25	0.6	2
EE2010019	EE2010119	2×15/17	0.5	2
EE2010020	EE2010120	2×15/20	0.6	2
EE2010021	EE2010121	2×18/14	0.5	2
EE2010022	EE2010122	2×18/17	0.6	2
EE2010023	EE2010123	2×24/10	0.5	2
EE2010024	EE2010124	2×24/13	0.6	2

Provide customized transformer