


EPC ferrite core

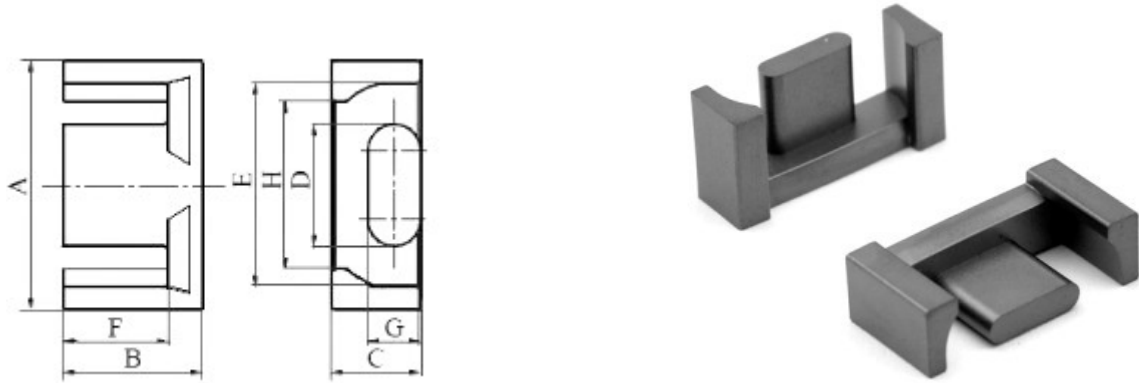

Type	Dimensions(mm)								Effective Parameter				AL ±25% n H/N ²	Weight
	A	B	C	D	E	F	G	H	C1 mm ⁻¹	Le mm	Ae mm ²	Ve mm ³	P40	g/pair
EPC13/ 13/5	13.5 ±0.3	4.6 ±0.2	6.6 ±0.2	5.6 ±0.2	10.5 min	4.5 ±0.2	2.05 ±0.2	8.3 min	2.46	30.6	12.5	382	870	2.1
EPC14/ 13/5	13.6 ±0.3	6.8 0.2	4.6 ±0.2	5.6 ±0.2	11.0 min	4.7 ±0.2	2.05 ±0.15	9.0 min	2.46	30.6	12.5	382	870	2.1
EPC17/ 17/6	17.8 ±0.4	8.75 ±0.2	6.0 ±0.3	7.7 ±0.2	15.1 min	6.25 ±0.2	2.80 ±0.2	12.3 min	1.76	40.2	22.8	917	1360	5.0
EPC19/ 19/8	19.8 ±0.4	9.75 ±0.2	6.0 ±0.2	8.5± 0.15	16.0 min	7.25 ±0.2	2.5 ±0.15	13.1 min	1.88	43.3	12.5	995. 9	1400	6.6