

SMT Shielded Power Inductors

GSRH124B / GSRH125B / GSRH127B


GSRH129B

Features (特長)

- Magnetically shielded construction (閉磁路構造設計)
- Compact and thin (輕便薄小)
- Large Current and Low DCR (大電流低直流阻抗)

Applications (用途)

- VTR, OA equipment, LCD television set, Notebook, portable communication equipments, DC/DC converters, etc.. (錄放影機、OA 儀器、液晶電視、筆記型電腦、小型通信機器、直流轉換器等)




Product Identification (產品識別)

GSRH124B - _____ (Ex. GSRH124B-101N)

1 2 3

1. SMT Shielded Power Inductors (閉磁式功率電感)
(GSRH124B, GSRH125B, GSRH127B, GSRH129B)
2. Inductance (電感值)
3. Tolerance (誤差值) (參照表 K 10%, L 15%, M 20%, N 30%)

Configurations & Dimensions (結構圖及規格尺寸)

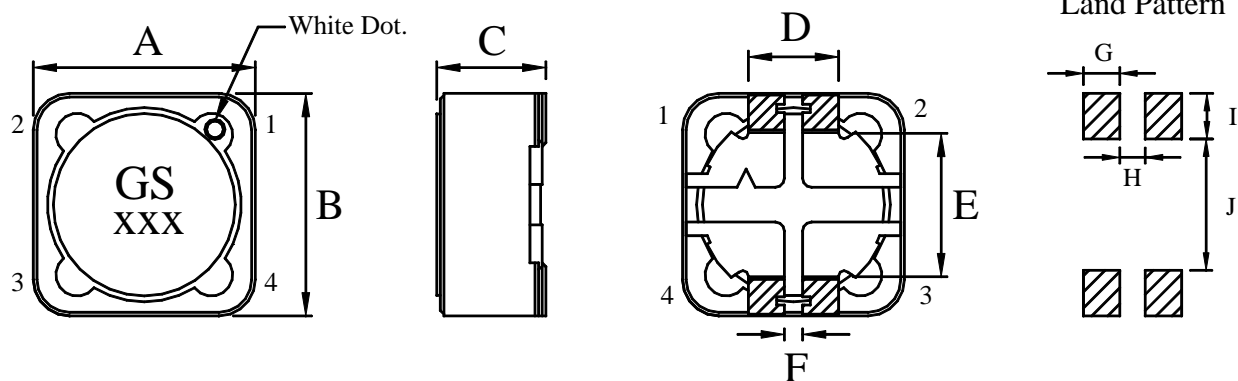

Unit In mm

Type (型式)	A	B	C (max)	D	E	F	G	H	I	J
GSRH124B	±0.3	±0.3	4.7	±0.2	±0.2	±0.2	2.0	1.4	2.9	7.2
GSRH125B	±0.3	±0.3	6.2	±0.2	±0.2	±0.2	2.0	1.4	2.9	7.2
GSRH127B	±0.3	±0.3	8.0	±0.2	±0.2	±0.2	2.0	1.4	2.9	7.2
GSRH129B	±0.3	±0.3	10.0	±0.2	±0.2	±0.2	2.0	1.4	2.9	7.2

♣ Design as Customer's Requested Specifications. (可依客戶特殊需求設計)