

SMT Unshielded Power Inductors GS3316DHP

Features (特長)

- Open Magnetic circuit construction (開磁路構造設計)
- Compact and thin (輕便薄小)
- Mn-Zn material core (錳鋅材之鐵芯)
- Self-leaded construction (直接線端之構造)

Applications (用途)

- Notebook, Low voltage DC-DC converter, power supply applications (筆記型電腦、低電壓直流轉換器、電源供應器)




Product Identification (產品識別)

GS3316DHP - _____ (Ex. GS3316DHP-R33N)

1 2 3

1. SMT Unshielded Power Inductors (開放式功率電感) (GS3316DHP)
2. Inductance (電感值)
3. Tolerance (誤差值) (參照表 K 10%, L 15%, M 20%, N 30%)

Configurations & Dimensions (結構圖及規格尺寸)

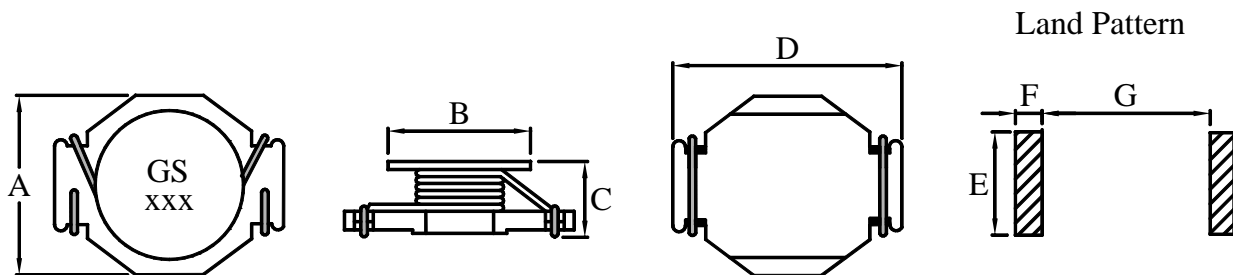

Unit In mm

Type (型式)	A (max)	B ±0.3	C (max)	D (max)	E	F	G
GS3316DHP	9.91	8.38	6.35	13.21	4.06	1.52	8.64

✦ Design as Customer's Requested Specifications. (可依客戶特殊需求設計)

SMT Unshielded Power Inductors

GS3316DHP

Electrical Characteristics for GS3316DHP Series [GS3316DHP 系列電子特性規格]

Part Number 產品料號	Inductance (μ H) 電感值 (L)	Test Freq. (KHz) 測試頻率	DCR (Ω) (max) 直流阻抗	IDC (A) (max) 定格電流
GS3316DHP -R33N	0.33	100	0.002	20.00
GS3316DHP -R68N	0.68	100	0.005	13.00
GS3316DHP -1R0N	1.00	100	0.006	11.00
GS3316DHP -1R5M	1.50	100	0.008	9.00
GS3316DHP -2R2M	2.20	100	0.011	7.80
GS3316DHP -2R7M	2.70	100	0.012	7.00
GS3316DHP -3R3M	3.30	100	0.014	6.40
GS3316DHP -4R7M	4.70	100	0.018	5.40

※Test Freq. : 100KHz / 0.1V

※Operating Temp. : -40°C ~ $+85^{\circ}\text{C}$

※Inductance drop = 10% typ. at IDC.