
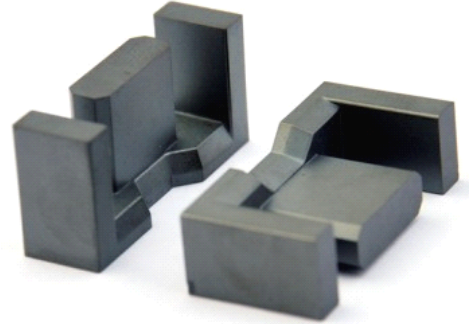



EFD ferrite core



Type	Dimensions(mm)							Effective Parameter				AL ±25% n H/N ²	Weight
	A	B	C	D	E	F	G	C1 mm ⁻¹	Le mm	Ae mm ²	Ve mm ³	P40	g/pair
EFD15/ 15/5	15.0 ±0.35	7.50 ±0.2	4.65 ±0.15	5.30 ±0.2	11.0 ±0.3	5.60 ±0.2	2.3± 0.15	2.27	34.0	15.0	510	900	2.8
EFD21/ 20/7	20.6 ±0.5	10.0 ±0.2	6.6 ±0.2	8.9 ±0.2	16.0 min	7.80 ±0.2	3.6± 0.15	1.62	48.19	29.76	1433. 9	1310	6.9
EFD25/ 25/9	25.4 ±0.6	12.7 ±0.2	9.10 ±0.3	11.4 ±0.2	18.7 min	9.6 ±0.2	5.2± 0.15	0.96	56.50	58.60	3314	2000	16.7
EFD26/ 25/9	25.8 ±0.6	12.7 ±0.2	9.10 ±0.3	11.4 ±0.2	19.5 5min	9.6 ±0.2	5.2 ±0.2	1.08	60.00	55.33	3320	2400	16.7
EFD31/ 30/9	31.6 ±0.5	15.0 ±0.2	9.1 ±0.3	14.6 ±0.25	23.4 min	11.3 ±0.2	4.90 ±0.2	1.3	67.62	68.68	4660	2600	23.1